


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H05K 3/32, H01R 9/09</b>		A1	(11) International Publication Number: <b>WO 00/03569</b>
			(43) International Publication Date: 20 January 2000 (20.01.00)
(21) International Application Number: PCT/US99/00322 (22) International Filing Date: 4 January 1999 (04.01.99) (30) Priority Data: 09/114,586                      13 July 1998 (13.07.98)                      US (71) Applicant: FORMFACTOR, INC. [US/US]; 5666 La Ribera Street, Livermore, CA 94550 (US). (72) Inventor: ELDRIDGE, Benjamin, N.; 651 Sheri Lane, Danville, CA 94523 (US). (74) Agents: SCHELLER, James, C., Jr. et al.; Blakely, Sokoloff, Taylor & Zafman LLP, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US).			(81) Designated States: AL, AM, AT, AT (Utility model), AU (Petty patent), AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published <i>With international search report.</i>

(54) Title: INTERCONNECT ASSEMBLY FOR PRINTED CIRCUIT BOARDS AND METHOD OF FABRICATION

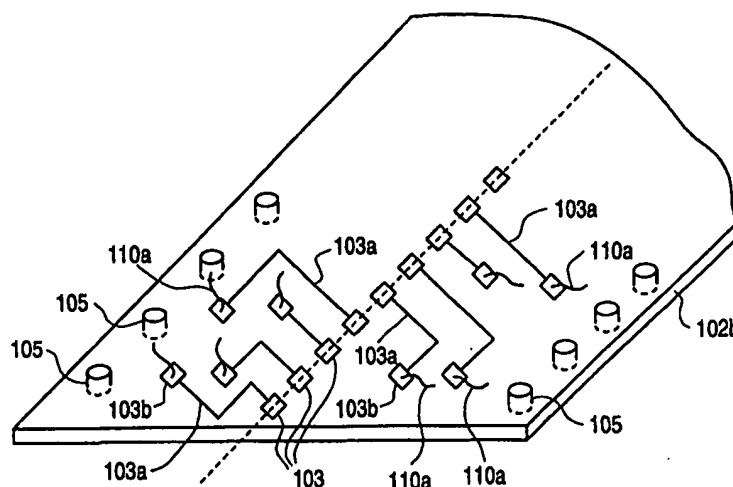

## (57) Abstract

Interconnect assembly for printed circuit boards and method for forming them. In one example of the invention, an interconnect assembly comprises a substrate, a resilient contact element and a stop structure. The resilient contact element is disposed on the substrate and has at least a portion thereof which is capable of moving to a first position, which is defined by the stop structure, in which the resilient contact element is in mechanical and electrical contact with another contact element. In another example of the invention, a stop structure is disposed on a first substrate with a first contact element, and this stop structure defines a first position of a resilient contact element, disposed on a second substrate, in which the resilient contact element is in mechanical and electrical contact with the first contact element. Other aspects of the invention include methods of forming the stop structure and using the structure to perform testing of integrated circuits, including for example a semiconductor wafer of integrated circuits.